



**TYPICAL MAILBOX APPROACH**

**GENERAL NOTES**

- ① S = Normal width of bituminous shoulder as shown on plans.
- ② W = Width of mailbox approach at mailbox.  
W = 3600 preferred, 3000 minimum greater than 1500. A.D.T. equal to or  
W = 3000 preferred, 2400 minimum for A.D.T. of 100 or greater, and less than 1500.
3. Mailbox approach pavement material shall be the same as the shoulder material.

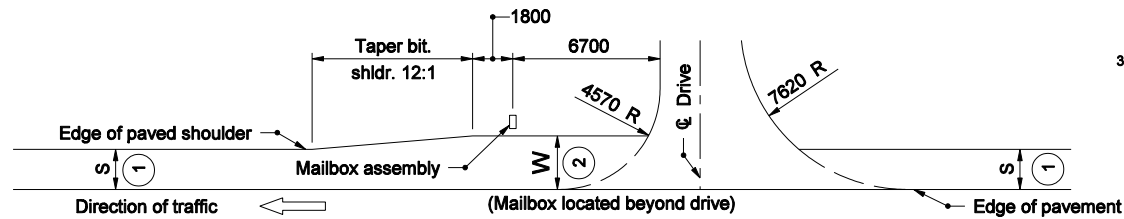

**COMBINATION MAILBOX APPROACH & DRIVE**

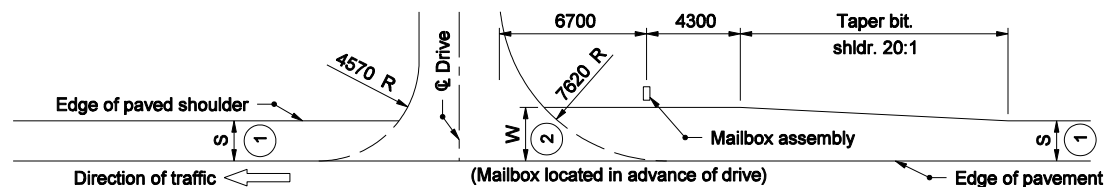

**COMBINATION MAILBOX APPROACH & DRIVE**

All dimensions are in mm unless otherwise specified

INDIANA DEPARTMENT OF TRANSPORTATION

**MAILBOX APPROACH  
PLAN VIEWS**

**SEPTEMBER 2004**

**STANDARD DRAWING NO. 610-MBAP-01**

	/s/ Richard L. VanCleave	9-01-04
	DESIGN STANDARDS ENGINEER	DATE
	/s/ Richard K. Smutzer	9-01-04
DESIGN STANDARDS ENGINEER	CHIEF HIGHWAY ENGINEER	DATE